




PRODUCT NAME:New School LED
ITEM NUMBER:30243SWSN 30245SWSN 90240SWSN

Please consult your electrician for hanging fixture and wiring.

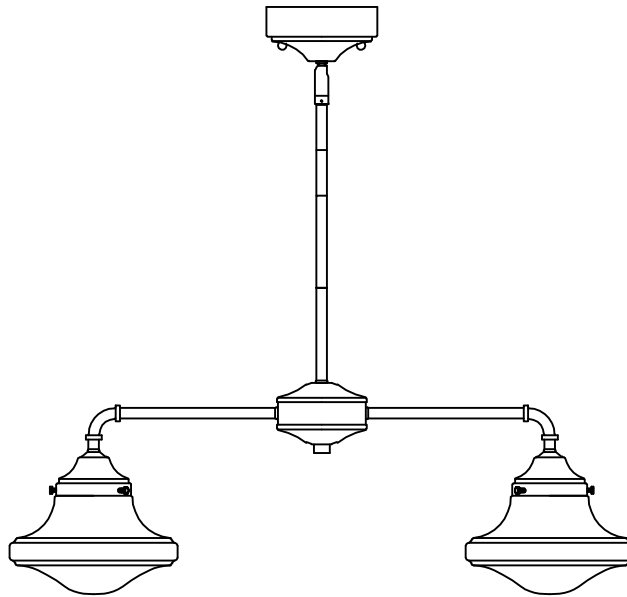

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

- Lutron MACL-153M**
- Lutron DVL-153P**
- Lutron SCL-153P**
- Leviton IPL06-10Z**
- Leviton 6674-POW**

Due to inrush current, wattage should not exceed 150 Watts of product for a 600W dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.


30243SWSN : 23W LED 3000K DIMMABLE
30245SWSN : 35W LED 3000K DIMMABLE
90240SWSN : 9W LED 3000K DIMMABLE



PRODUCT NAME: New School LED
 ITEM NUMBER: 30243SWSN 30245SWSN 90240SWSN

CAUTION: Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

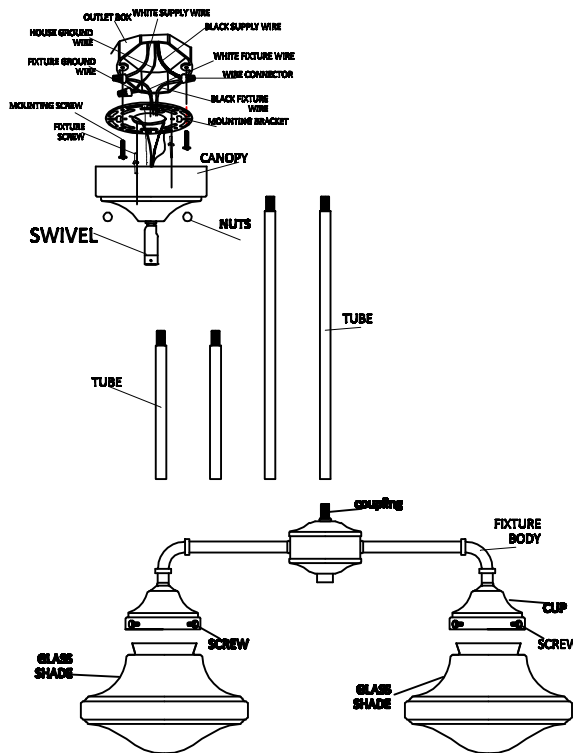

- 1: Thread the HEX NUTS onto the FIXTURE MOUNTING SCREWS, and screw the SCREWS onto the MOUNTING BRACKET, without tightening the HEX NUT.
- 2: Pull the power supply wires out from the OUTLET BOX, and mount the MOUNTING BRACKET to the OUTLET BOX, using MOUNTING SCREWS.
- 3: Place the CANOPY of the fixture over the OUTLET BOX and onto the FIXTURE MOUNTING SCREWS, and adjust the HEX NUTS until it protrudes 1/4" out from the CANOPY. Remove the CANOPY and secure the position of the SCREWS by tightening the HEX NUT against the MOUNTING BRACKET.
- 4: Attach the BLACK SUPPLY WIRE to the SMOOTH FIXTURE LEAD WIRE by using the WIRE CONNECTOR. In the same manner, attach the WHITE SUPPLY WIRE to the RIBBED FIXTURE LEAD WIRE. Connect the FIXTURE GROUND WIRE to the SUPPLY GROUND WIRE using a WIRE CONNECTOR.
- 5: Place the CANOPY back onto the FIXTURE SCREWS, and secure into place using the DECORATIVE NUTS provided.
- 6: Screw the TUBES together using the NIPPLES, then attach the TUBES to the SWIVEL. Attach the other end of the TUBE to the COUPLING that is part of the CUP, slide the GLASS SHADE over the CUP, then screw on the SCREW.
- 7: Screw light bulbs into the lamp sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.